

LUTHER G9 FLOOR / TABLE LAMP


INSTALLATION INSTRUCTIONS

These instructions are provided for your safety.


Please read carefully before commencing work and retain for future reference.


These products
are sold
individually.

SAFETY INFORMATION

- * The supply cable runs through the inside of the fitting. Take care not to place undue stress on the cable whilst unpacking to prevent the possibility of a poor connection.
- * If the external flexible cable of the lamp is damaged it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.
- * If you are in any doubt consult a person competent to give advice on the assembly of electrical equipment.
- * To prevent electrocution switch off at the mains supply before assembling or maintaining this fitting. Ensure the plug is not connected to any power supply and read instructions before assembly.
- * Always be sure to use the correct type and wattage of bulbs as indicated on the fitting. Do not exceed wattage stated.
- * This fitting is designed for use with self-shielded tungsten halogen lamps only. 
- * When changing the bulb, always switch off at the mains and allow the old bulb to cool down before handling. Dispose of old bulbs carefully.

ASSEMBLY

- 1) Ensure product is not connected to the mains supply.
- 2) Unpack the product and remove all packaging. Take care not scratch the surface of the product whilst removing the plastic wrapping. Ensure the ends of the poles or the plug do not scratch base.
- 3) Lay the product out on the floor, having previously covered it with a soft cloth to avoid damage to the flooring and product finish. Assembly should take place with the product lying flat.
- 4) It may be necessary to remove protective packaging (plastic / cardboard) located at cable entry points of the product.
- 5) Screw upper pole into the top, bulb holder section. ① Take care to hold poles parallel to avoid cross threading. Hold the bulb holder section still and turn the pole so as not to twist the cable.
- 6) Screw the lower pole onto the upper pole. ② Hold the upper section still and only rotate the lower pole to prevent the cable becoming twisted. Hold poles parallel to avoid cross threading.
- 7) Gently pull excess cable out of the centre of the base until the lower pole meets the base.
- 8) Turn the base onto the lower pole, keeping the pole parallel to avoid cross threading. ③ Keep the pole stationary and only rotate the base. Pull any excess cable out through the grommet in the side of the base.
- 9) Stand the floor lamp upright and ensure all the assembled parts are fully tightened.
- 10) Remove the shade ring from the bulb holder. And attach this onto the shade fitting tool.
- 11) Fit bulbs: Type and wattage as indicated on the fitting. ④ **The wattage indicated must not be exceeded.**  **Always use self-shielded bulbs.** Do not touch halogen bulbs with bare hands, as this will shorten their life.
- 12) Fit glass shades: Carefully offer glass shades ⑤ over the bulbs and use the shade ring ⑥ attached onto the shade fitting tool ⑦ to secure the glass into position. Take care not to over tighten as this may damage the glass.
- 13) The lamp is now ready for use. Plug lamp in and switch it on.

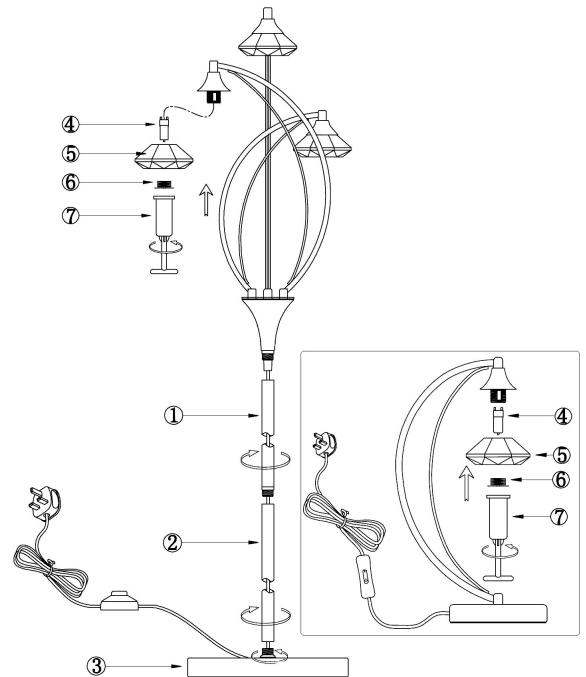

GENERAL INFORMATION

This product is designed for internal use only. **Do not use polish or abrasive cleaner** – just a soft dry cloth.