

PLAZA PENDANT FITTING INSTALLATION INSTRUCTIONS

These instructions are provided for your safety.

Please read carefully before commencing work and retain for future reference.

SAFETY INFORMATION


- * If you are in any doubt consult a person competent to give advice on the installation of electrical equipment.
- * This fitting should be fitted in accordance with IEE Wiring Regulations and the Building Regulations
- * To prevent electrocution switch off at the mains supply before installing or maintaining this fitting. Ensure other persons cannot restore the electricity supply without your knowledge.
- * To avoid damage to concealed wiring during installation, establish the direction of the supply cable before drilling fixing holes.
- * This fitting is Class 2 = therefore no earth is required and should be fitted to a lighting supply protected by a 5 amp fuse or equivalent circuit breaker.
- * Always be sure to use the correct type and wattage of bulbs as indicated on the fitting. Never exceed the wattage stated.

INSTALLATION

1. Ensure the house electricity supply is off at the fuse board.
2. Before removing the existing fitting, carefully note the position of each set of cables. If there are loop in cables that are not connected to the light these must be terminated in a separate terminal block not connected to the fitting.
3. Remove mounting bracket from fitting by undoing retaining screws at the sides, keep these and any washers for later.
4. Using the mounting bracket as a template, mark and drill the fixing holes in the ceiling. Ensure holes are drilled into a joist or other suitable mounting and not into plaster.
5. Feed the supply cable through the mounting bracket and attach this onto the ceiling with suitable fixings. **Take care not to damage wiring.**
6. **Pendant Height Adjustment: This is not a rise and fall fitting.** The height of the fitting must only be adjusted during installation and then permanently locked at the desired height. To shorten support wires simply pull them through the ceiling cup. To lengthen support wires press the small tube, through which wire enters the ceiling cup, whilst pulling wire to the desired length. Release the tube to lock wire into position. The thin suspension wires and not the electrical cable must always take the weight of the fitting. Adjust electrical cable by pushing/pulling it through the ceiling cup.
7. Use a screwdriver to lever open the connector block housing and feed supply cable through the rubber sleeve. Whilst supporting the weight of the fitting, make electrical connections as follows:
Connect supply live (normally brown or red) to fitting live (marked "L") on the terminal block.
Connect supply neutral (normally blue or black) to fitting neutral (marked "N") on the terminal block.
Please note: No earth should be connected to any part of this fitting. If any earth wires are present please terminate these in a separate terminal block (not supplied) to ensure that continuity is maintained for the earth circuit.
Ensure electrical connections are tight and no loose strands of wire are left out of the terminal block. Ensure terminals and rubber sleeve is correctly seated then close connector block housing by snapping together.
8. Where required fit excess cable into the ceiling void or inside the ceiling cup along the length of ceiling cup.
9. Attach the fitting to the mounting bracket using the retaining screws removed earlier. **Take care not to trap wires.**
10. Fit a washer then the diffuser onto the stem on main body of the fitting the secure this into position using the washer and retaining nut, **do not over tighten the nut.**
11. Fit the bulb, type and wattage as indicated on the fitting. **The wattage indicated in the fitting must not be exceeded.**
12. Switch on the electricity supply at the fuse board. If fitting fails to illuminate, check that the wiring is sound and lamp is correctly connected.

GENERAL INFORMATION

This fitting is designed for internal use only and must be fitted to a DRY SURFACE as any dampness in plaster or paint can damage the finish. **Do not use polish or abrasive cleaner - just a soft dry cloth.**

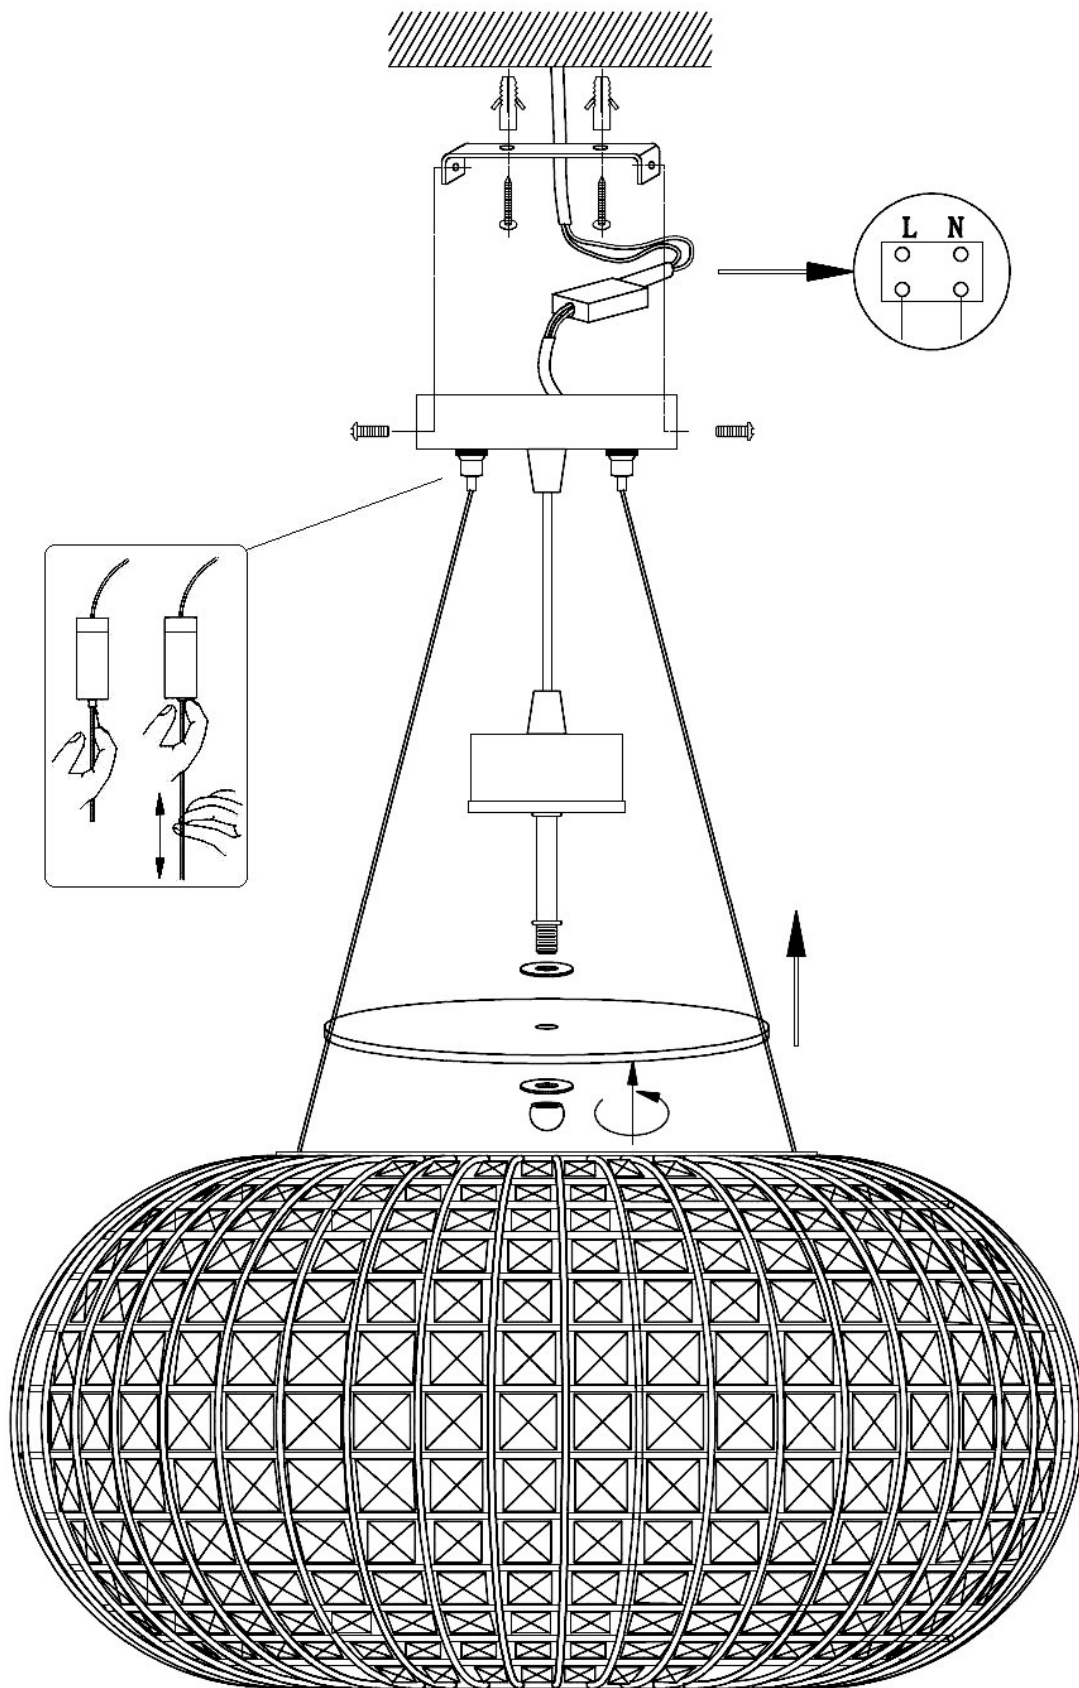

This diagram is offered as a guide only.
Please follow all the safety and installation information overleaf.